





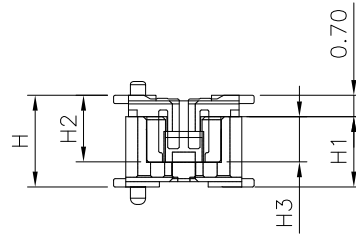


REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	01Jan16	AW	WK

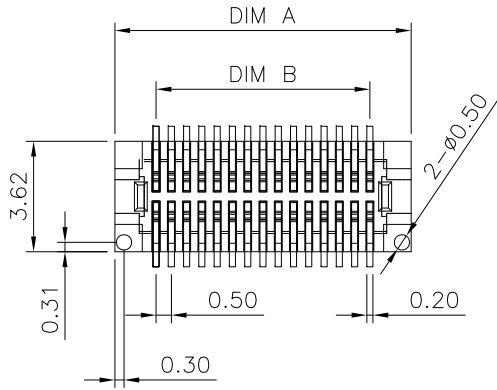

NO. of Contacts	Dimension (mm)			
	A±0.10	B±0.10	C±0.10	D±0.10
20	7.20	4.50	6.60	5.60
30	9.70	7.00	9.10	8.10
40	12.20	9.50	11.60	10.60
50	14.70	12.00	14.10	13.10
60	17.20	14.50	16.60	15.60

**ELECTRICAL:**  
 VLOTAG RATING:50V AC(RMS)/DC  
 CURRENT RATING:0.5A AC(RMS)/DC  
 CONTACT RESISTANCE:50MΩ MAX  
 INSULATION RESISTANCE:100MΩ MIN  
 DIELECTRIC WITHSTANDING VOLTAGE:200V AC R.M.S  
 OPERTING TEMPERATURE:-30°C~+80°C  
**MATERIRLS**  
 HOUSING:HIGH TEMPERATURE PLASTIC  
 UL94V-0  
 TERMINAL:COPPER ALLOY  
 MATERIAL:PA46 NC  
 CONTACT:PHOSPHOR BRONAE,GOLD PLATING;

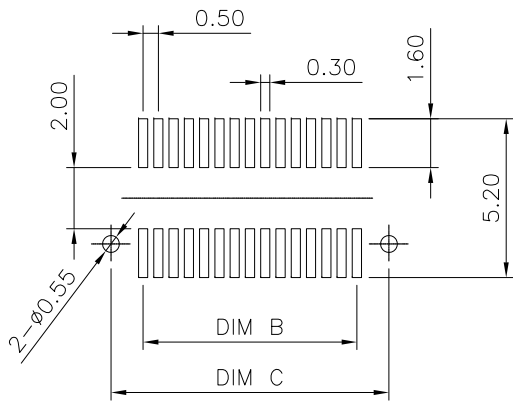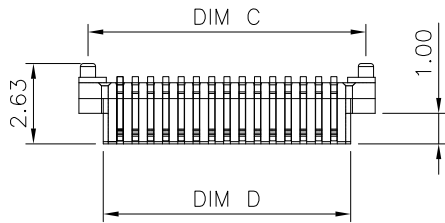

High photosynthesis (H)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
3.0	2.3	2.2	1.6
5.0	4.3	2.7	2.0

YL007-008-XXX  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 01Jan2016	<b>东莞市宇亮电子有限公司</b> DONG GUAN YU LIANG ELECTRONICS CO.,LTD NAME <b>0.5MM BOARD TO BOARD 公座 单槽立式</b> SIZE A4 DRAWING No. YL007-008
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHEK S. CHIEN 01Jan2016	
 THIRD ANGLE PROJECTION	0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	APVD Abel 01Jan2016 PRODUCT SPEC WEIGHT -	
	CUSTOMER DRAWING		