



FH127-2XX-XXX
 Female Header Type1/Type2
 Pitch 1.27mm
 Dual Row No.of Pins
 Dual Row:3~50

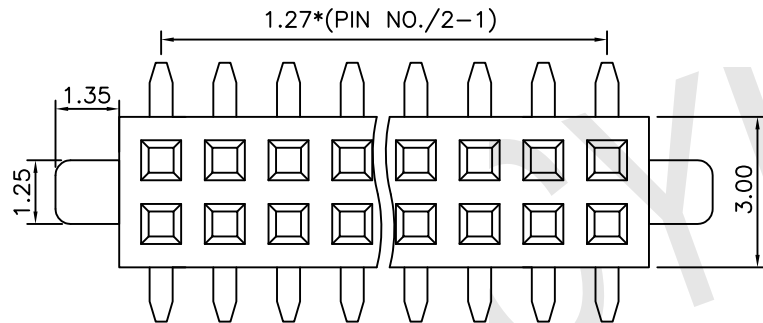

DIM A
3.40
4.30

PRODUCT SPECIFICATION

- 1.INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 2.TERMINAL MATERIAL : COPPER ALLOY .
- 3.FINISH : GOLD OR TIN PLATED.
- 4.CURRENT RATING : 1 AMPERE.
5. NSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
 测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

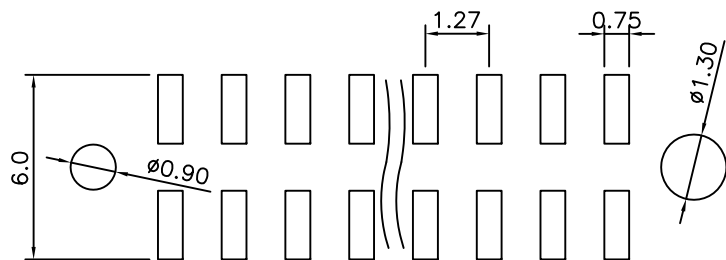

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08012016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK 08Jan2016		
 THIRD ANGLE PROJECTION		APVD Abel 08Jan2016	NAME Female Header 1.27mm Dual Row SMT Type	
		PRODUCT SPEC — WEIGHT —	SIZE A4	DRAWING No. YL-ED-XXX
		CUSTOMER DRAWING	SCALE 1 : 1	SHEET 1 of 1