
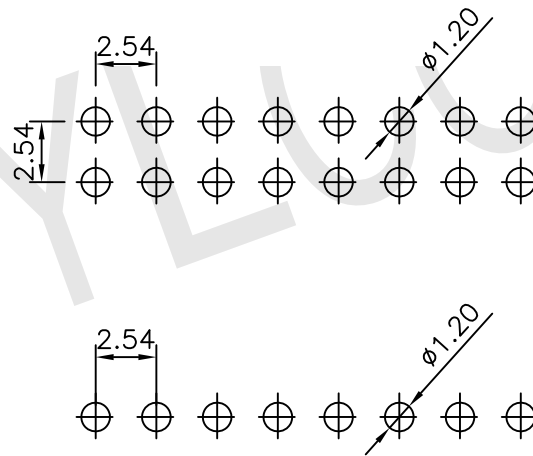


FH254-XXX-XXX

Female Header
 Pitch 2.54mm
 2: Dual Row
 1: Single Row

Type1/Type2

 No.of Pins
 Dual Row: 2~40
 Single Row: 2~40

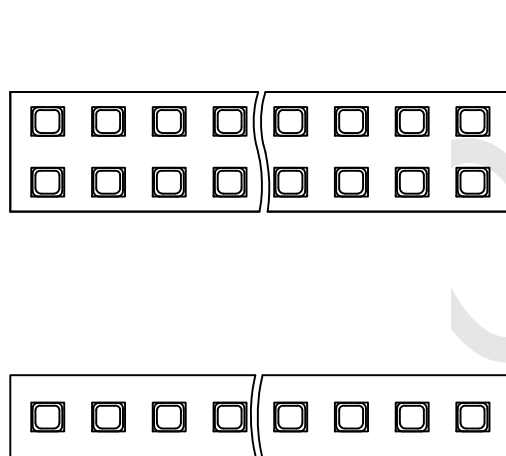

PRODUCT SPECIFICATION

- INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- TERMINAL MATERIAL : COPPER ALLOY .
- FINISH : GOLD OR TIN PLATED.
- CURRENT RATING : 3 AMPERE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
- OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	080102016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK	08Jan2016		
 THIRD ANGLE PROJECTION		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		Female Header 2.54mm*6.80mm DIP Type	
		APVD	08Jan2016	SIZE	DRAWING No.
		Abel		A4	YL-ED-XXX
		PRODUCT SPEC		SCALE	SHEET
		WEIGHT		1 : 1	1 of 1
		CUSTOMER DRAWING			