

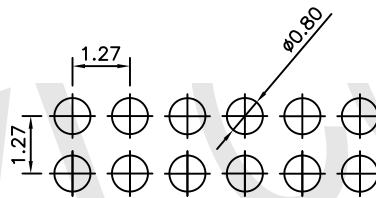


FH127-XXX-XXX
 Female Header
 Pitch 0.80mm
 2: Dual Row
 1: Single Row
 Type1/Type2

 No.of Pins
 Dual Row: 2~50
 Single Row: 2~50

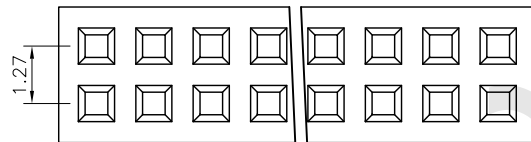

- PRODUCT SPECIFICATION
- INSULATOR MATERIAL : POLYESTER, UL94V-0 .
 - TERMINAL MATERIAL : COPPER ALLOY .
 - FINISH : GOLD OR TIN PLATED.
 - CURRENT RATING : 1 AMPERE.
 - INSULATION RESISTANCE : 1000M OHMS MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
 - CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
 - OPERATING TEMPERATURE : - 40°C to +105°C.

DIM A	DIM B	W1	W2
2.00	1.80	3.00	2.20
3.40	2.40	3.00	2.20
4.30	2.40	3.00	2.20

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 0801192016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK 08Jan2016		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		APVD Abel 08Jan2016	NAME Female Header 1.27mm DIP Type	
		PRODUCT SPEC — WEIGHT —	SIZE A4	DRAWING No. YL-ED-XXX
THIRD ANGLE PROJECTION		CUSTOMER DRAWING	SCALE 1 : 1	SHEET 1 OF 1