





5

4


3

2

1

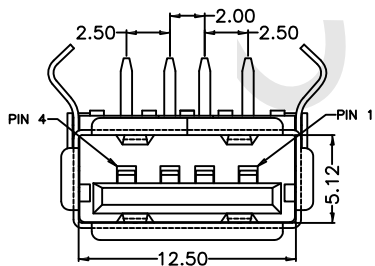

Housing: Thermoplastics, UL94V-0
 Contact: Copper Alloy
 Shell: Copper Alloy
 Voltage Current Rating: 1.5AMP, 30V AC
 Insulation Resistance: 1000M ohm Min
 Contact Resistance: 30M ohm Max
 Dielectric Withstanding Voltage: 500V AC
 Temperature Range: -55°C~+85°C

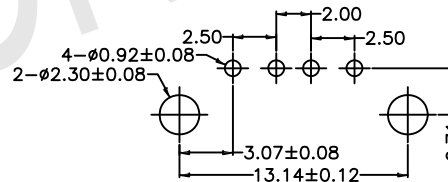

PC BOARD LAYOUT

A	RELEASED	2017\03\17	杨磊	WK
LTR (版本)	DESCRIPTION (变更内容描述)	DATE (日期)	DWN (绘图)	APVD (核准)
REVISIONS (修订)				

THIS DRAWING IS A CONTROLLED DOCUMENT. (此图为宇亮公司受控文件)		DWN (绘图) 杨磊	2017\03\17	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO., LTD	
DIMENSIONS: (单位) mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: (自由公差参照)	CHEK (审核) S. CHIEN	2017\03\17	NAME (品名) USB A F R/A DIP (T) TYPE	
THIRD ANGLE PROJECTION (第三视图)	0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± 1	APVD (核准) Abel	2017\03\17	SIZE (尺寸) A4	
		PRODUCT SPEC (产品规范)	—	DRAWING No. (图号) YL001-017	
		WEIGHT (产品重量)	—	SCALE (比例) 1 : 1	
CUSTOMER DRAWING (业务图)			ANGLES (角度公差) ± 3°	SHEET (页码) 1 of 1	